


RS-CH240N4TUA-HALTF-W20PW

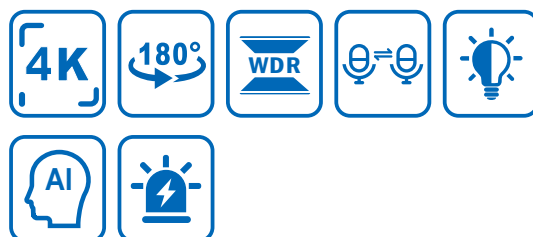

- 4k Ultra high resolution
- 180° Panoramic View
- 120dB WDR
- Built-in Microphone and Speaker
- Dual sources illumination
- Deep learning algorithm
- Sound and Warning light alarms


■ Specification

Video	
Imaging Device	1/2.8"
Effective Pixels	8MP 3840(H)×2160(V)
Scanning System	Progressive CMOS
Min. Illumination	Color 0.007lux @ F1.0(AGC ON) ; B/W 0 lux @ IR ON
Lens Type	
Focal Length (Zoom Ratio)	2.0 mm
Max. Aperture Ratio	F No. 2.4
Angular Field of View	Horizontal: 180°;Vertical: 91°; Diagonal: 180°
Min. Object Distance	0.6m
Lens Type	M12
Operational	
IR LED	2
WarmLight	2
IR Viewable Length	Up to 25m
WarmLight Viewable Length	Up to 15m
Backlight Compensation	Off/On (5 Zone)
Wide Dynamic Range	WDR
Digital Noise Reduction	3D DNR
Motion Detection	Off/On (8 Level)
Image Setting	Day&Night Mode/Full Color Mode/Schedule
Privacy Masking	Off/On (4 Zone, Rectangle)
Gain Control	Auto
White Balance	Auto/Manual
Electronic Shutter Speed	1/5 ~ 1/20000s

On-Board Storage	Micro SD slot, up to 256GB
Alarm	Built-in red & blue flashing lights
Audio	Built-in microphone, speaker
Hardware Reset	Yes
Smart Feature	PID,LCD,PD/VD,SOD,CC,Heat MAP,RSD
Network	
Ethernet	RJ45(10/100BASE-T)
Video Compression Format	H.265/H.264
Resolution	Main Stream 50/60Hz @ 20fps,8MP(3840x2160),5MP(2592x1944,3072x1728), 4MP(2592x1520),3MP(2304x1296),1080P(1920x1080), 960P(1280*960),720P(1280x720), Sub Stream 50/60Hz @ 20fps,720P(1280x720),VGA(640x480) Mobile Stream 50/60Hz @ 20fps,VGA(640x480)
Video Quality Adjustment	256Kbps ~ 16Mbps
Bitrate control method	CBR/VBR
Streaming Capability	Triple-Stream(Main/Sub/Mobile)
IP	IPv4/IPv6
Protocol	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP, SMTP,NTP,UPnP,SNMP,HTTPS,FTP
Security	IP address filter;complicated password; Authenticated username and password
Streaming Method	Unicast/Multicast
Application Programming Interface	ONVIF(Profile S/G/T)
Web Viewer	IE10/11 Safari V12.1 above Firefox V.52 above Google chrome V.57 above Edge V.79 above
Environmental	
Operating Conditions	-35~+60°C/less than ≤ 95% RH

Ingress Protection	IP67
Electrical	
Input Voltage / Current	D12V/POE(IEEE802.3af)
Power Consumption	Max. 12W
Mechanical	
Material	Metal
Dimension (WxHxD)	Ø95*241.3mm
Weight	836.3g

■ Dimension

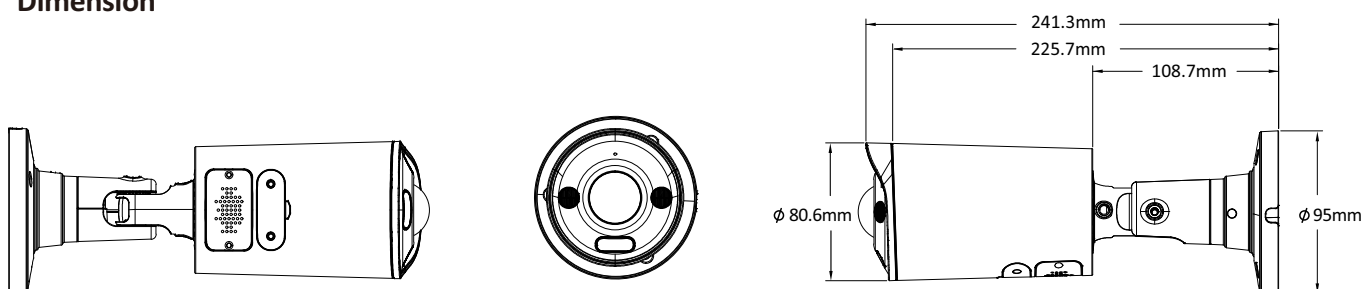

■ Accessory (Optional)

RS-CXH-N	RS-CXH100B-S	RS-CXH-I
		
RS-CXH-A	RS-CXH-M	RS-CXH100D-S
		
RS-BZJ-C-2	RS-CXH-J	RS-CXH-B
	