



Hangzhou Huier Cable Co.,Ltd

Tel:+86-571-63792788

Fax:+86-571-63792788

Web Site: www.huiercable.com

60159: 8 CORE SECURITY CABLE

Construction Parameters:

Conductor: 8C×14/0.20mm±0.005mm CCA

Insulation: 1.45mm ± 0.10mm PVC


Insulation Color: Red, Blue, White, Black, Green, Yellow, Brown, Light Gray

Ripcord: Yes.

Sheath: 6.30mm ± 0.2mm PVC White

Nom. Thickness: 0.65 mm

Min. Thickness: 0.60 mm

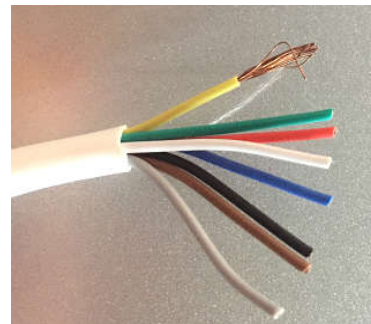

Mechanical Properties (20℃):

Rate Voltage	300V
Rate Temperature	-15℃ up to +70℃
Conductor Resistance(DC)	≤7.2Ω/100m
Insulation Resistance(DC)	≥0.010Ω/km
Conductor breaking elongation rate	≥15%
Insulation tension	≥16MPa
Sheath tension before aging	≥10MPa
Insulation breaking elongation	≥200%
Sheath breaking elongation before aging	≥125%
Sheath breaking elongation after aging	≥100%

Package: 100M/Plastic Reel , 4 Reels / Master Carton

Approved :

CE, RoHS