

HIKVISION

HiLook



HiLook

Intercom Products

CONTENTS

- 02 Product Family– Hilook Intercom Kit
- 03 IP Intercom Kit
- 04 2-Wire Intercom Kit
- 05 Hybrid Kit
- 06 4-Wire Kit

HiLook Intercom Kit

| | |
|-------------------------------|--|
| Video Quality | 2 MP, H: 129°, V: 75° |
| Screen Size | 7" touch screen |
| Door Station Protection Level | IP65 |
| Mobile App Control | YES |
| Capacity | Indoor station: 1 + 16 (max.) Door station: 1 + 16 (max.) |
| Accessory | Rain Cover: DS-KABV6133-RS |

| | |
|-------------------------------|-----------------------|
| Video Quality | 2 MP, H: 140°, V: 85° |
| Screen Size | 7" touch screen |
| Door Station Protection Level | IP65 |
| Mobile App Control | YES |
| Capacity | 1 to 1 |
| Accessory | / |

| | |
|-------------------------------|--|
| Video Quality | 2 MP, H: 117°, V: 70° |
| Screen Size | 7" touch screen |
| Door Station Protection Level | IP65, IK08 |
| Mobile App Control | YES |
| Capacity | Indoor station: 1 + 2 (max.) Door station: 1 + 1 (max.) |
| Accessory | Angle Bracket: DS-KABV6113-A |

| | |
|-------------------------------|--|
| Video Quality | 720P, H: 130°, V: 70° |
| Screen Size | 7" non-touch screen |
| Door Station Protection Level | / |
| Mobile App Control | NO |
| Capacity | Indoor station: 1 + 2 (max.) Door station: 1 + 1 (max.) |
| Accessory | Angle Bracket: DS-KABV24-A |

IP Intercom Kit



HA-DS-IP2



HA-IN-IP2

2-Wire Intercom Kit



HA-DS-Y2



HS-IN-Y72

Hybrid Kit



HA-DS-H1



HA-IN-H1

4-Wire Kit



HA-DS-A2



HA-IN-A2

IP Intercom Kit

HA-KIT-IP2

What's in the package

Includes one indoor monitor, one door station, 32GB TF card, wall mount bracket and one Australian standard power adapter.

Features

- Modern look with a slim-bezel indoor monitor and a sturdy metal-framed door station.
- Easy to add up to 16 indoor units.
- Control everything from Hik-Connect app.
- PC free quick setup with easy wizard.

IP65
RATING




HA-DS-IP2



HA-IN-IP2

Topology

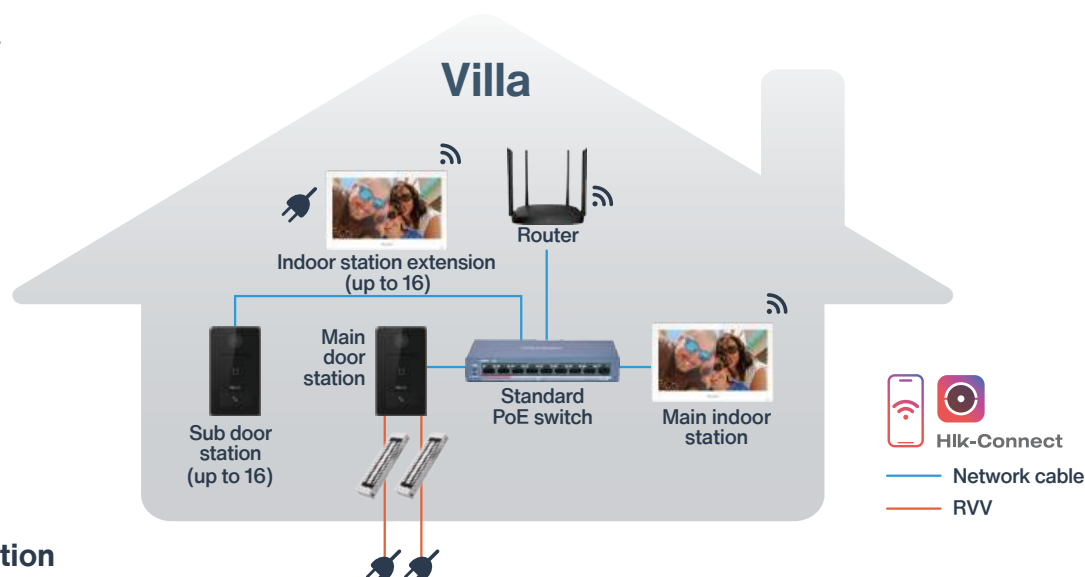

Specification

| | | |
|-----------|--------------------------------|--|
| HA-DS-IP2 | Camera | 2MP HD camera |
| | Night vision | Low illumination IR supplement mode: 2.5m |
| | Backlight compensation | Support |
| | Digital noise reduction | Support |
| | WDR | True WDR |
| | Field of view | Horizontal: 129° Vertical: 75° |
| | Motion detection | Support |
| | Network protocol | TCP/IP, SIP, RSTP |
| | Wi-Fi | 2.4GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n |
| | Door station/Device interfaces | RS-485 * 1 |
| | Lock control | 1 relay, Max. 30 VDC 2 A |
| | Dimension | 181.6 mm × 103.6 mm × 29.5 mm |
| | Protection level | IP65 |
| | Power supply | IEEE802.3af, standard PoE or 12 VDC |
| HA-IN-IP2 | Display screen | 7-inch colorful TFT screen |
| | Display resolution | 1024 × 600 |
| | Operation method | Capacitive touch screen |
| | Wired network | 1 RJ-45, 10/100 Mbps self-adaptive |
| | Wireless network | 2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n |
| | Power supply | Standard PoE/ 12 VDC |

2-Wire Intercom Kit

HA-KIT-PY2

What's in the package

Includes one indoor monitor, one door station, rain cover, wall mount bracket and one Australian standard power adapter.

Features

- 2-wire video intercom kit for villas or houses.
- Easy Plug-and-Play, one-to-one system.
- Control everything with a single app.
- Durable outdoor station with a high-quality stainless steel panel.

IP65
RATING




HA-DS-Y2



HS-IN-Y72

Topology

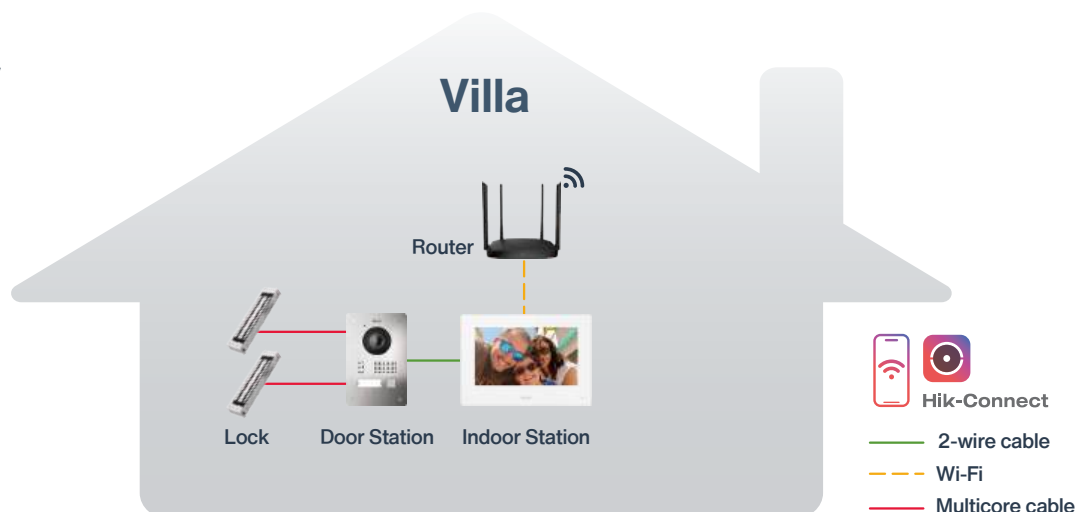

| Routing Path | Cable Specification | | | | |
|--|---------------------|-------|-------|-------|---|
| | AWG24 | AWG20 | AWG18 | AWG16 | Parallel Lines (0.5mm ² -0.8mm ²) |
| Door Station to Indoor Station Transmission Distance | ≤ 35m | ≤ 60m | ≤ 60m | ≤ 50m | ≤ 35m |

Specification

| | | |
|------------------|--|--|
| HA-DS-Y2 | Camera | 2MP HD camera |
| | Resolution | Main stream: 1280*720P, 1920*1080p Sub stream: 640*480 |
| | Night vision | Low illumination IR supplement distance: 3 m |
| | WDR | Support |
| | Field of view | Horizontal: 140° Vertical: 85° |
| | Built-in 1*omnidirectional microphone and Built-in 1*loudspeaker, 8Ω | |
| | Wired network | 2-Wire wiring |
| | Alarm input | 2(Exit button or door contact) |
| | Output | 1*12 V/500 mA output |
| | Protection level | IP65 |
| | Power supply | From indoor station |
| HS-IN-Y72 | Display screen | 7-inch TFT touch screen |
| | Display resolution | 1024 × 600 |
| | Network parameters | Wired network 1*10 Mbps through 2-wire interface Wireless network: Wi-Fi 802.11 b/g/n, 2.400-2.4835 GHz |
| | Power input | 24VDC/1.5A |

Hybrid Kit

HA-KIT-H1

What's in the package

Includes one indoor monitor, one door station, 5-meter 4-wire cable, wall mount bracket and one Australian standard power adapter.

Features

- A highly budget-friendly, internet-enabled solution.
- Indoor station with daisy-chain connection for simpler wiring.
- Convenient all-in-one app control.

IP65
RATING




HA-DS-H1




HA-IN-H1

Topology

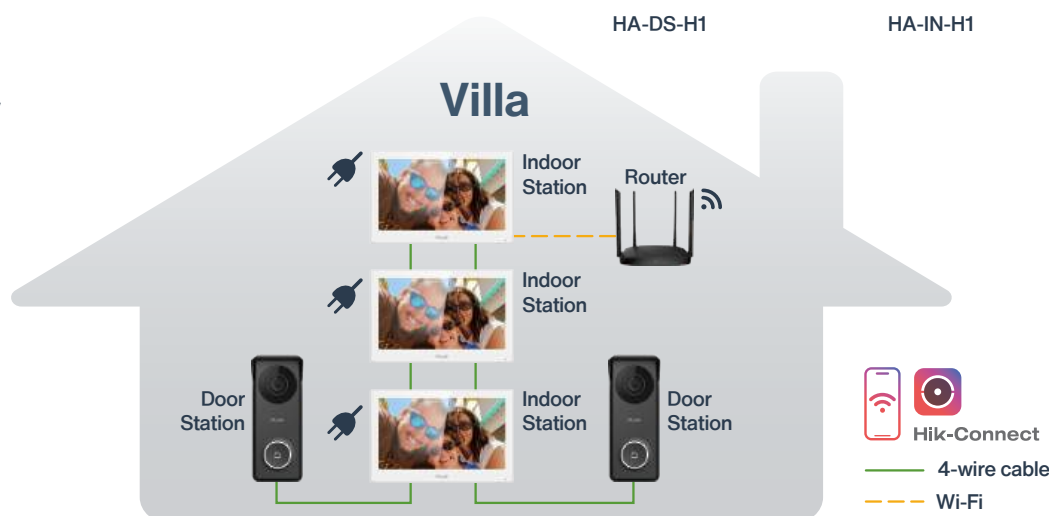

Wiring suggestion

If you use two groups of parallel cables or twisted pairs instead of the supplied white four-wire cables for wiring, you should put the blue cable (video) and black cable (ground) in the same group of parallel cables or twisted pairs and put the yellow cable (audio) and red cable (power) in the same group.

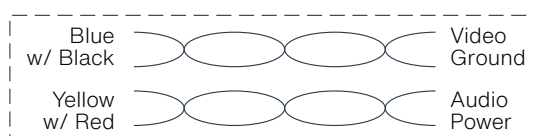

| Routing Path | Cable Specification | | | |
|--|---------------------|------------|------------|-------------|
| | AWG24 | AWG20 | AWG18 | AWG16 |
| Door Station to Indoor Station Transmission Distance | ≤ 10m | 10m< ≤ 30m | 30m< ≤ 50m | 50m< ≤ 100m |

Specification

| | | |
|----------|-----------------------|---|
| HA-DS-H1 | Supplement light | IR light, up to 3 m |
| | Resolution | Stream resolution:1280 * 720@60fps |
| | FOV | Horizontal: 117°, Vertical: 70°, Diagonal: 141° |
| | Lock control | 1 relay, max 30 V 1 A |
| | Power supply input | From indoor station |
| | Dimension (W × H × D) | 55 mm × 145 mm × 24 mm |
| | Protective level | IP65, IK08 |
| | Material | Aluminum alloy |
| HA-IN-H1 | Type | 7 inch Colorful TFT |
| | Resolution | 1024 × 600 |
| | Operating method | Capacitive touch screen |
| | Wi-Fi | Wi-Fi 802.11 b/g/n |
| | Power supply input | 12 VDC |

4-Wire Kit

HA-KIT-A2

What's in the package

Include one indoor monitor, one door station, 5-meter 4-wire cable, wall mount bracket and one Australian standard power adapter.

Features

- HD TVI video quality with a wide field of view (96% improvement over traditional solutions).
- Indoor station supports daisy-chain connection for easy wiring.
- Easy plug-and-play setup for the analog system.



HA-DS-A2




HA-IN-A2

Topology



Wiring suggestion

If you use two groups of parallel cables or twisted pairs instead of the supplied white four-wire cables for wiring, you should put the blue cable (video) and black cable (ground) in the same group of parallel cables or twisted pairs and put the yellow cable (audio) and red cable (power) in the same group.

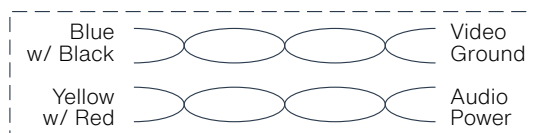

| | Cable Specification | | | |
|--|---------------------|------------|------------|-------------|
| Routing Path | AWG24 | AWG20 | AWG18 | AWG16 |
| Door Station to Indoor Station Transmission Distance | ≤ 10m | 10m< ≤ 30m | 30m< ≤ 50m | 50m< ≤ 100m |

Specification

| | | |
|-----------------|---|---|
| HA-DS-A2 | Supplement light | IR light, up to 3 m |
| | Resolution | Stream resolution: 1280 * 720@60fps |
| | FOV | Horizontal: 130°, Vertical: 70° |
| | Built-in omnidirectional microphone and loudspeaker | |
| | Lock control | 1 relay, max 30V 1 A |
| | Button | 1 physical button(s) |
| | Power supply | From indoor station |
| | Dimensions | 136mm x 51mm x 20mm |
| | Material | Plastic |
| HA-IN-A2 | Type | 7-inch colorful TFT |
| | Resolution | 1024 x 600 |
| | Power supply input | 12V DC |
| | Four-Wire interface | 4 in all, 2 for indoor extentions, 2 for doorphones |
| | Dimensions (W x H x D) | 178mm x 132mm x 19mm |



Australia

Sydney office
46 Brookhollow Ave, Baulkham Hills, NSW 2153
Hotline: +61 1300 976 305

