

RS-D7204HR-NS-T-E




- Supports up to 4K Analog cameras and IP camera inputs.
- Supports HDCVI/AHD/TVI/CVBS/IP video input.
- Supports up to 6 channels of IP camera input; with a maximum input bandwidth of 36Mbps.
- Supports dual-stream video compression with H.264/H.265.
- Supports the standard ONVIF protocol.
- With 4 alarm inputs and 1 alarm output.
- Supports a variety of AI functions: face detection, perimeter intrusion detection, line crossing detection, detection of people and vehicles, intrusion, entry into area, and exit from area.
- Equipped with 1 built-in hard disk drive slot and 1 external eSATA.
- Allows for remote access via mobile devices and computers.
- Supports external alarm devices and has an RCA interface for voice intercom.

■ Specification

Recording	
Inputs Bandwidth	12Mbps ~36Mbps
out Bandwidth	64Mbps
Analog video-input	4CH inputs
IP Video Input	2ch, (only IP up to 6ch)
Performance	
Recording Compression	Audio: G.711a Video: H.264/H.265
Display resolution	Analog : 8MP(15fps) 5MP(20fps) 4MP/1080P/720P/960H (30fps) IP : 4K/4MP/1080P/720P Single channel preview up to 4K 30fps multi-channel preview only substream
Speed	Analog : 8MP: 8fps(each ch) 5MP: 16fps(each ch) 4MP: 18fps(each ch) 1080P: PAL:25fps(each ch)/NTSC:30fps(each ch) IP : PAL: 25fps(each ch)/NTSC: 30fps(each ch)
AI	Face Detection Perimeter Intrusion Detection Line Crossing Detection Human&Vehicle Detection Intrusion Enter Region Exit Region
Playback	1080P:136fps Max 4CH playback
Network	
Remote Connection	Up to 640 Users
Recording and Playback	IE10/11 Safari V12.1 above Firefox V.52 above Google chrome V.57 above Edge V.79 above

Protocols	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, UPnP, HTTP, HTTPS
API	RSAPI/Onvif (profile S/G/T)
Voice command	Home Device : Google Assistant, Amazon Alexa
Interface	
P/W Reset	YES
BNC	1 (704*576)
VGA	1 (1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080)
HDMI	1 (1024*768,1280*720,1280*1024,1440*900,1920*1080,2560*1440(2K), 3840*2160(4K))
Ethernet	1 RJ45 10/100 Base-T
USB	USB2.0*1(front); USB2.0*1(rear)
Audio	4 in / 1 out
E-sata	1
HDD	1 SATA HDD, up to 10TB
RS485	1
Alarm Input/out	4 in /1 out
General	
OSD Language	English/French/Spanish/Portuguese/German/Italian/Greek/Danish/Finnish/Russian/Hebrew/Turkish/Bulgarian/Arabic/Korean/Japanese/Thai/Hindi/Romanian/Dutch/Polish/Persian/Hungarian/Chinese/Ukrainian
Dimension (WxDxH)	300X227X53mm
Weight	0.66 kg (1.46 lb.)
Input Voltage/Current	12V/2A
Power consumption (excluding hard disk)	2.7W
Operating Temperature /Humidity	Temperature : -10°C~+50°C (14°F - 122°F) Humidity : Less than 90%RH
FCC	YES
CE	YES

Physical Interface

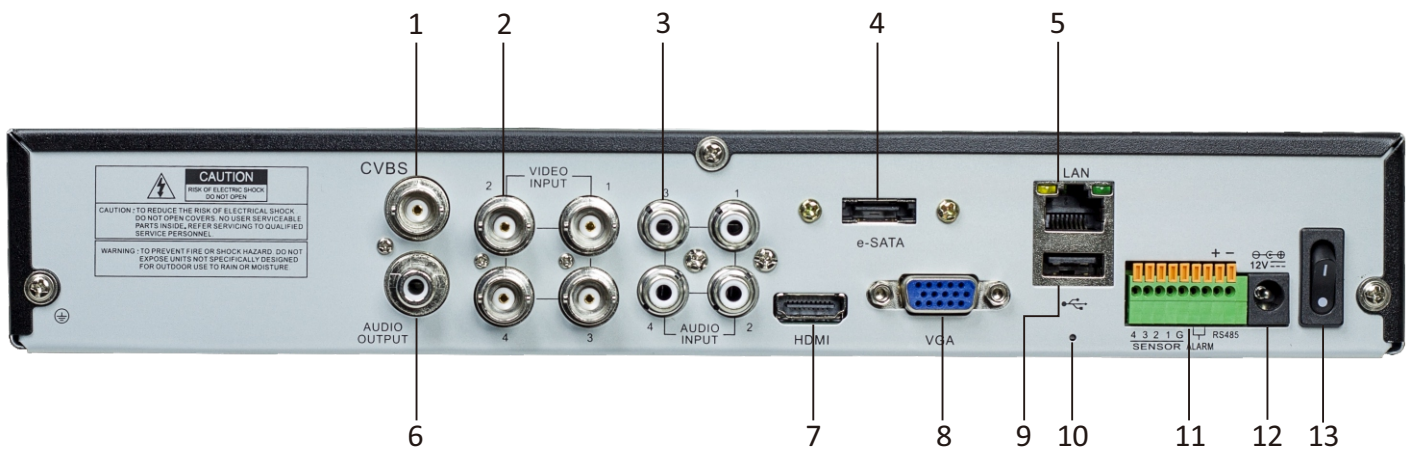

NO.	Description	NO.	Description
1	CVBS	8	VGA
2	VIDEO INPUT	9	USB interfaces
3	AUDIO INPUT	10	RESET Button
4	e-SATA	11	Sensor, Alarm & Rs485
5	LAN interface	12	Power
6	AUDIO OUTPUT	13	Power Switch
7	HDMI		