


Product Introduction

This switch is crafted from high-quality aluminum alloy, boasting a sleek and sophisticated design. It offers a solid, durable touch and is resistant to wear and scratches, seamlessly integrating with a variety of contemporary home decor styles. It connects to the gateway through the standard Zigbee protocol to ensure the stability and efficiency of data transmission. Whether for remote control or scene linkage, the device can respond instantly, significantly improving the convenience of home life.

Features


- Aluminum alloy material, wear-resistant and scratch-resistant
- Available 1 to 4 relay options to suit various needs
- Powerful ZigBee transceiving capability, with repeater Function
- Supports Belahome APP and HyPanel control

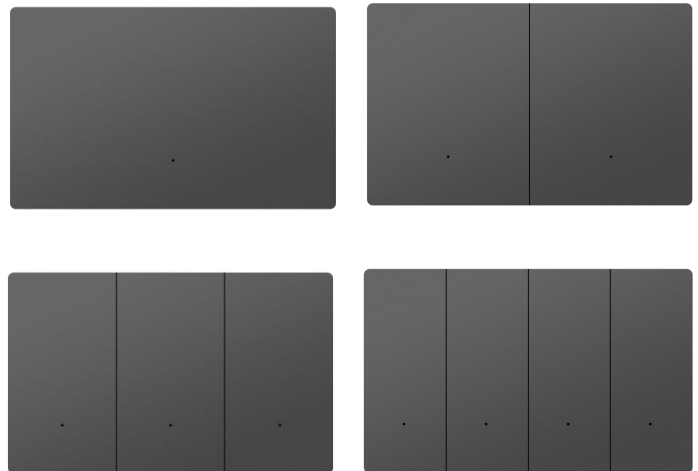

Specification

- Product Models: ZBM2-R1-US、ZBM2-R2-US、ZBM2-R3-US、ZBM2-R4-US
- Input Voltage: 110~240VAC, 50/60Hz
- Rated Current: 16A (Max)
- Communication Method: ZigBee
- Load Limits: Max 700W per channel(Resistive load)
Max 300W per channel(LED load)
- Working Temperature: - 10 ~ 55°C
- Working Humidity: ≤95%RH (non-condensing)
- Product Size: 117.7x72.7x36.4mm
- Colors: Grey

Wiring Diagram

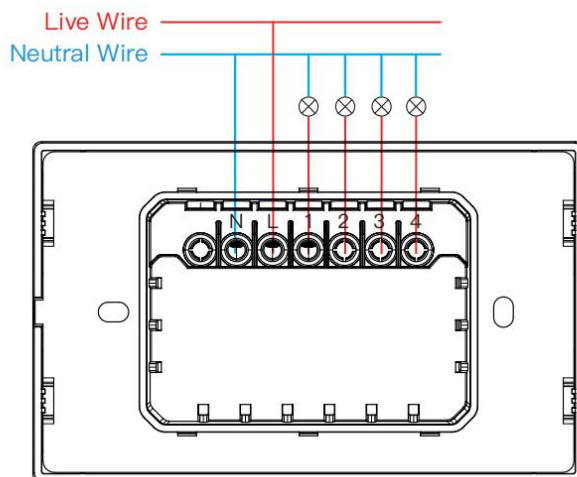

Networking Method

1. Connect the power cord correctly according to the wiring diagram to power the device;
2. Press and hold any button for about 10 seconds, the device's indicator light flashes quickly, indicating it has entered the network pairing mode;
3. Add the device to the network through a gateway device.

Product Dimension Diagram (mm)

