




**1080P**  
FULL HD

1920 x 1080  
Full HD



RJ45 PoE  
Input



178°/178°  
Viewing Angle



HDMI Digital  
Input

**LED**

1920 x 1080  
Full HD



3-Years  
Warranty

## Product Feature

- Industrial level DID LCD panel, suitable for extensive 7×24 continuous works.
- Physical resolution of 1920×1080.
- 5ms fast response time, no image ghosting.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- Picture fast response; 178° wide viewing angle; Ensure that the image display is not deformed.
- High fidelity digital processing, brilliant and vivid video.
- Built-in speaker.
- Humanize Menu; Convenient Controller.

## DNle digital image processing

Dynamic optimization



Natural color




Contrast enhancement



Detail enhancement



## Wide Viewing Angles(Up to 178° )

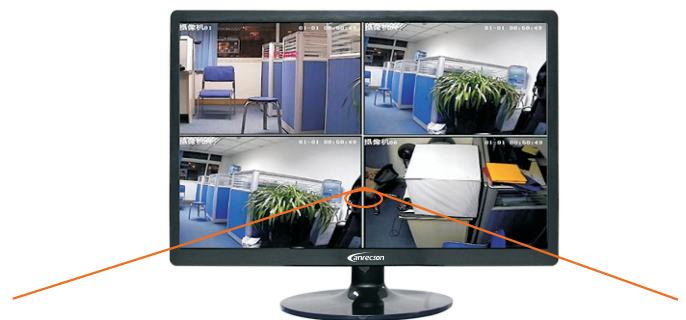

178° (H)/178° (V)

## DISPLAY CHARACTERISTICS

Mode Name	LC-ME2401-PoE
Screen Size	24''
Active Display Area (mm)	521.28mm(W)×293.22mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 × 1080
Display Color	16.7M
Pixel Pitch(mm)	0.248(H)×0.248(V)
Brightness(nits)	300cd/m <sup>2</sup>
Contrast Ratio	1000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED

## INPUT&OUTPUT

HDMI 2.0	1
VGA	1
Speaker	2
USB	1
RJ 45 input	1

## VIDEO


Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Video Noise Reduction	YES

## POWER&Mount Way



Power	DC12V ,50/60Hz or POE Input AT Standard
Working Temperature	-30 to +85 °C
Power Consumption	≦25W
Menu	Chinese/English(other languages supported)
Mounting/Weight	Stand mount, VESA mount/3.5kg
MTBF	50000Hours

## ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	---

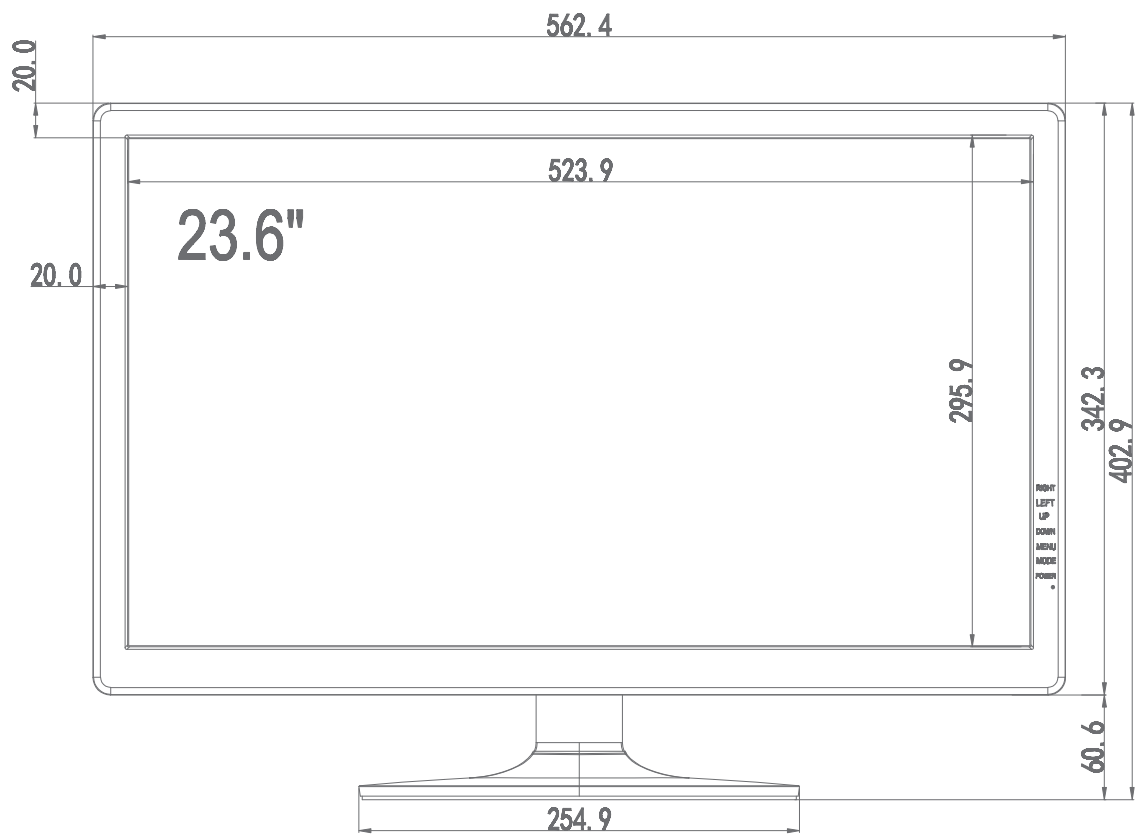

Unit:mm

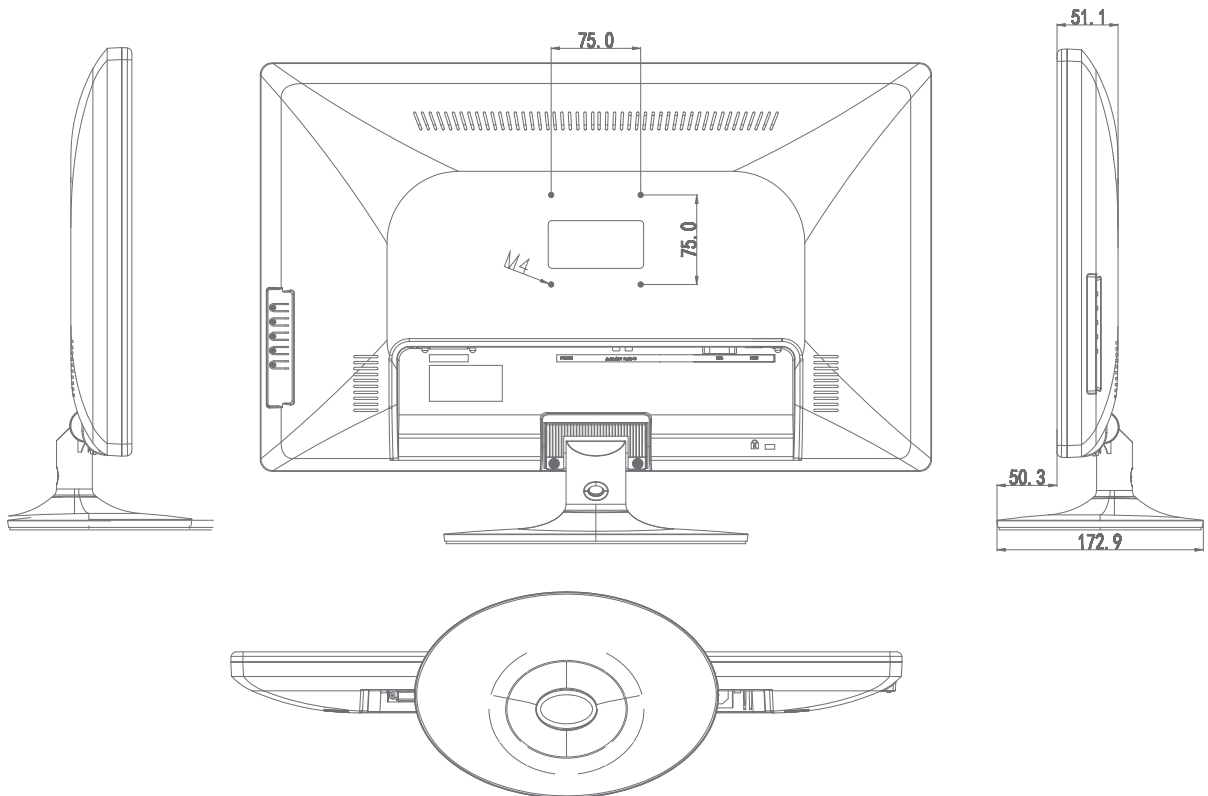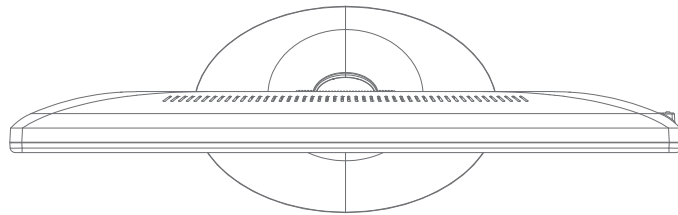

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice.  
All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© ANRECSON CORPORATION ( ). ALL RIGHTS RESERVED.