



Product Feature

- 4K HD Solution
- Using all-imported industrial-grade LED screen, Designed for CCTV.
- High brightness, High contrast, High definition.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- Picture fast response; 178 ° wide viewing angle; Ensure that the image display is not deformed.
- 7/24 working Status; Continue working 5 years.
- Metal chassis design, Anti-static, Anti-magnetic field, Anti-interference, no radiation.
- Humanize Menu; Convenient Controller.

DNle digital image processing

Dynamic optimization



Natural color



Contrast enhancement



Detail enhancement



4K UHD HD resolution

UHD Quality

3840P/2160P

4*FUHD/8*HD



DISPLAY CHARACTERISTICS

Mode Name	LC-ME2801-4K
Screen Size	28"
Active Display Area (mm)	620.93mm(W)× 341.3mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	3840 × 2160
Display Color	1.073G
Pixel Pitch(mm)	0.1617(H)×0.1617(V)
Brightness(nits)	350cd/m ²
Contrast Ratio	1000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

HDMI 2.0	1
DP	1
USB	1
Power	1
Speaker	2x3W(Stereo)

VIDEO


Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Support Picture in Picture (PIP)	YES

POWER&Mount Way


Power	AC100V~240V,50/60Hz
Working Temperature	-30 to +85 °C
Power Consumption	≦40W
Menu	Chinese/English(other languages supported)
Mounting/Weight	VESA mount/7kg
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	---

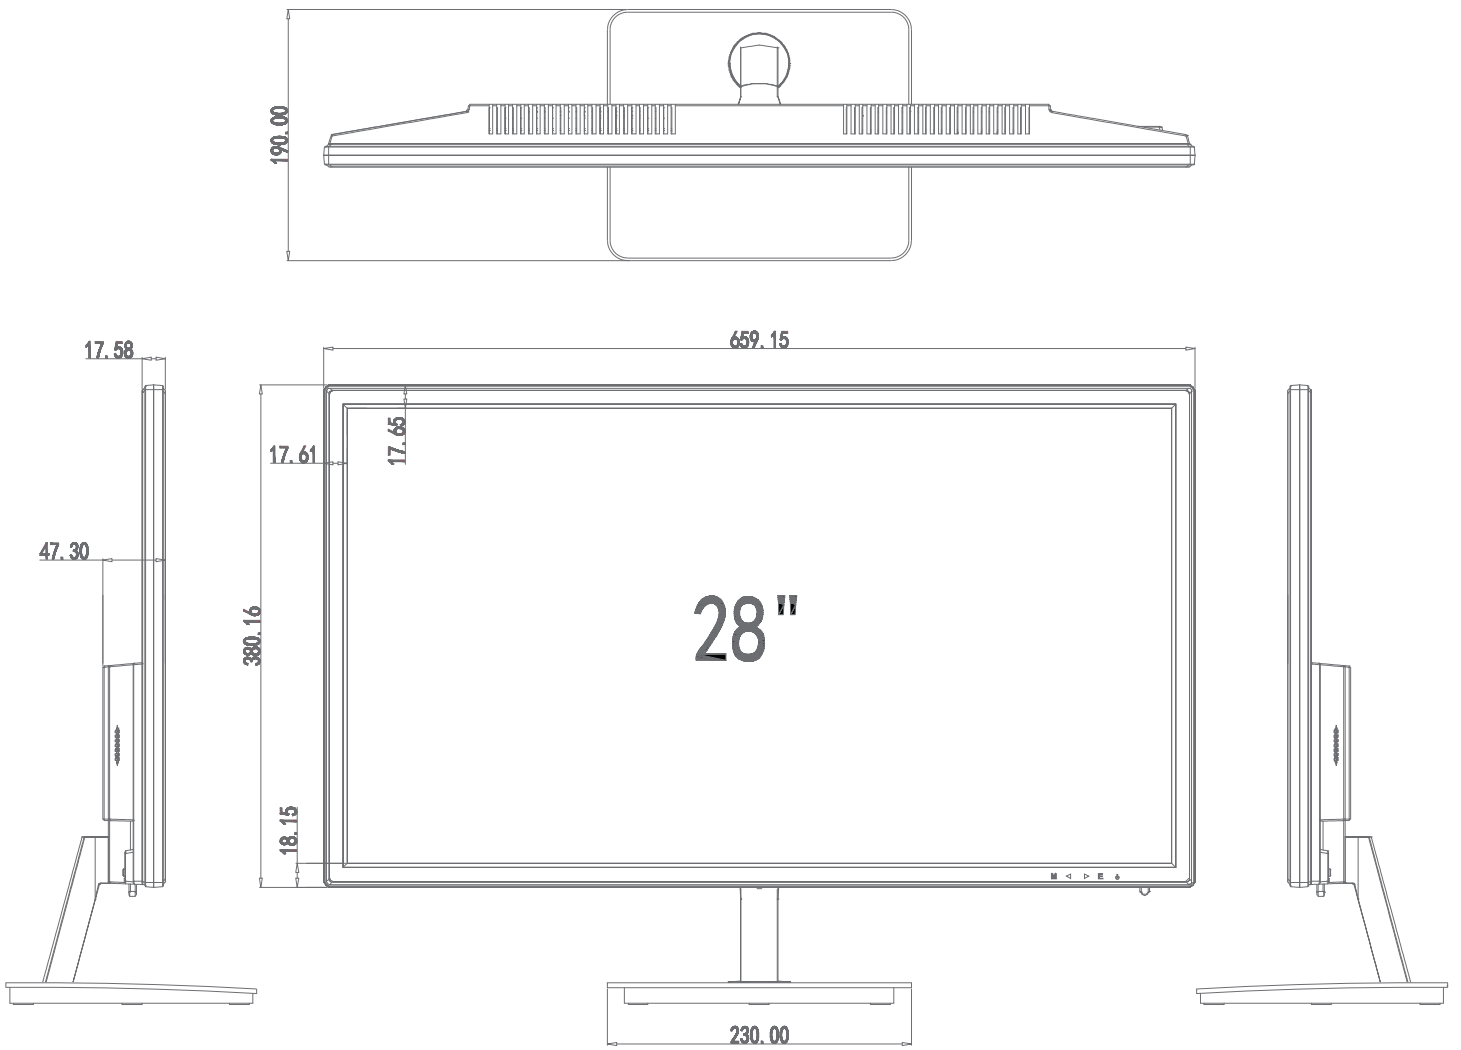

Unit:mm

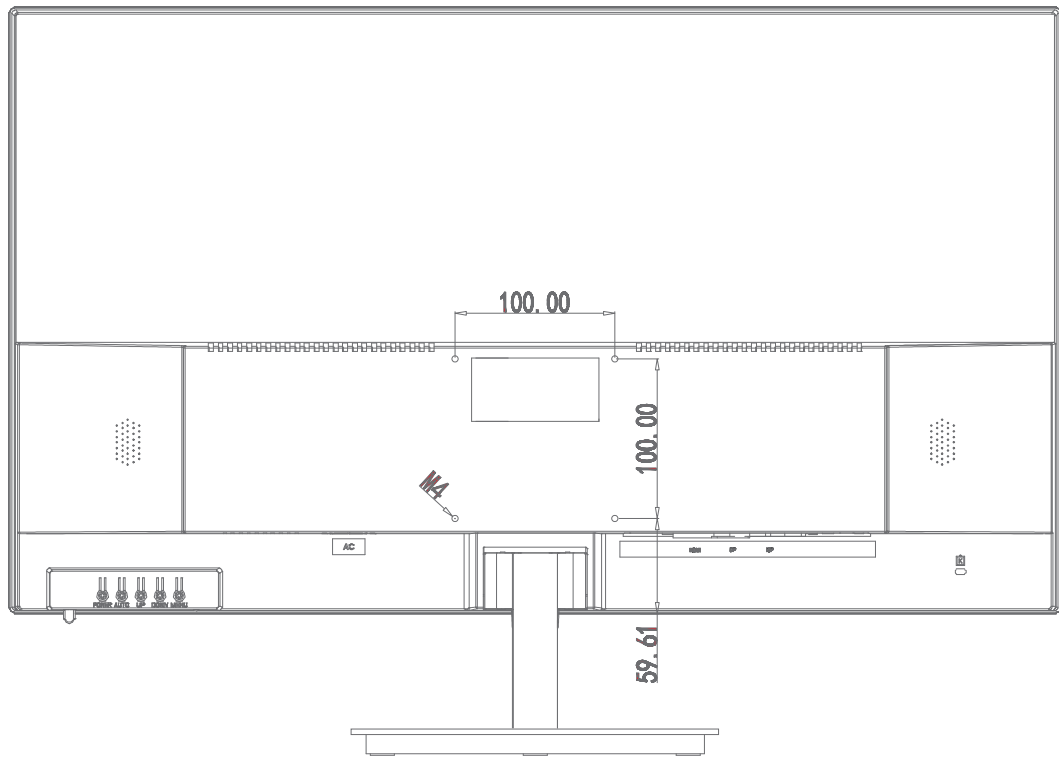

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© ANRECSON CORPORATION (). ALL RIGHTS RESERVED.