



Product Feature

- Industrial level DID LED panel, suitable for extensive 7×24 continuous works.
- Physical resolution of 1920×1080.
- 5ms fast response time, no image ghosting.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- Picture fast response; 178° wide viewing angle; Ensure that the image display is not deformed.
- High fidelity digital processing, brilliant and vivid video.
- Built-in speaker.
- Humanize Menu; Convenient Controller.

DNle digital image processing

Dynamic optimization



Contrast enhancement




Natural color



Detail enhancement



120Hz Dynamic processing

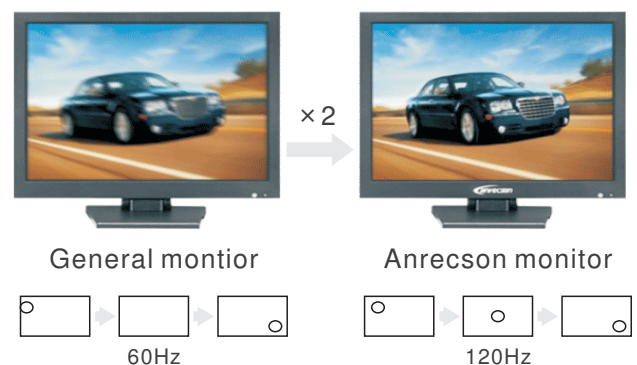

DISPLAY CHARACTERISTICS

Mode Name	LC-MS3201
Screen Size	32"
Active Display Area (mm)	697.6845mm(W)×392.256mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 × 1080
Display Color	16.7M
Pixel Pitch(mm)	0.51075(H)×0.51075(V)
Brightness(nits)	300cd/m ²
Contrast Ratio	1300:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

HDMI 2.0	1
VGA	1
BNC input	2
BNC output	1
Speaker	2x3W(Stereo)

VIDEO


Color System	PAL/NTSC/SECAM/YPrPb video
Compatible HDTV input	480P,576P,720P,1080I, 1080P
3D comb filter	YES
Video Noise Reduction	YES

POWER&Mount Way




Power	AC100V~240V,50/60Hz
Working Temperature	-30 to +85 °C
Consumption	≦40W
Menu	English
Mounting/Weight	Stand mount, VESA mount/12kg
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	-------------------------------------------------------

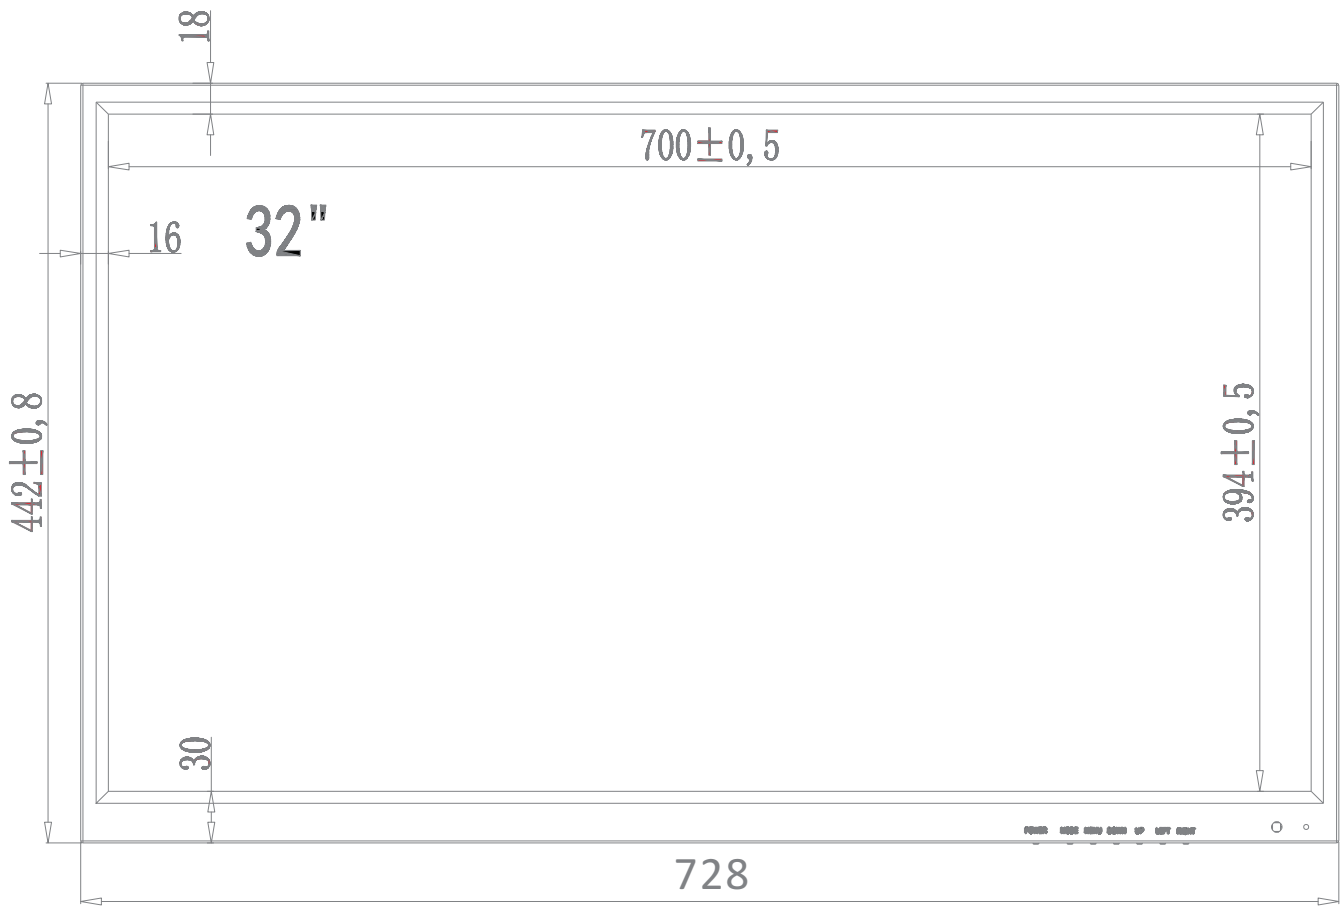

Unit: mm

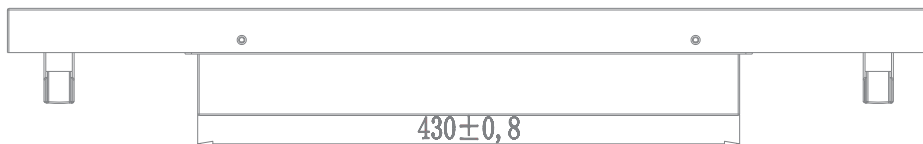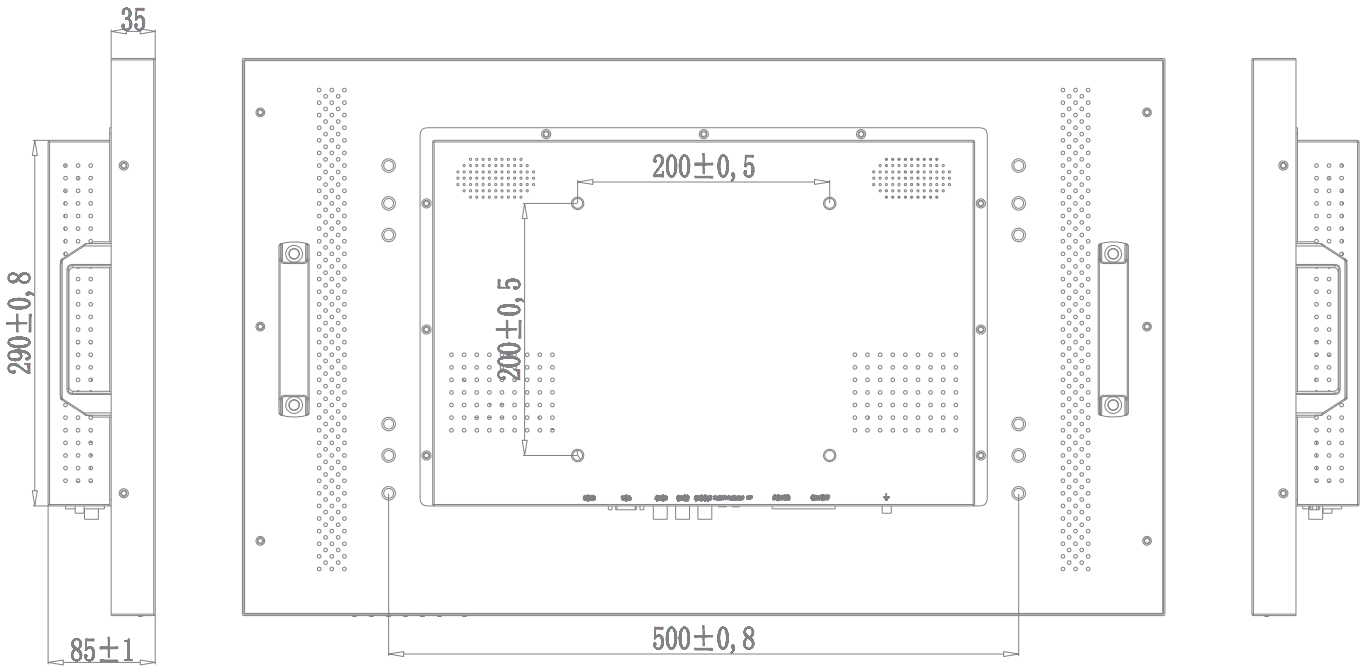

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.